# METERING FAUCETS 732-VBCP Urinal Valves

# **Product Type**

Wall Mounted Angle Angle Urinal Valve with Riser

# **Features & Specifications**

#### Angle

- NAIAD Metering Adjustable Cycle Time Closure Cartridges
- 1/2" NPT Female Thread Inlet
- 3/4" O.D. Slip Outlet
- Slip Wall Flange
- 3/4" O.D. x 10-1/4" Riser
- Anti-Siphon Vacuum Breaker
- Atmospheric Vacuum Breaker, Not Intended for Continuous Pressure Applications

Atmospheric Vacuum Breaker, Not Intended for Continuous Pressure
Applications

## **Performance Specification**

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140°F

### Warranty

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty

### **Codes & Standards**

- ASME A112.18.1/CSA B125.1
- ASSE 1001



a Geberit company

| Job Name              |                              |
|-----------------------|------------------------------|
| Item Number           |                              |
| Section/Tag           |                              |
| Model Specified       |                              |
| Architect             |                              |
| Engineer              |                              |
| Contractor            |                              |
| [] Submitted as Shown | [] Submitted with Variations |
| Date                  |                              |





2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454 Technical: 800/TEC-TRUE www.chicagofaucets.com


# 732-VBCP Urinal Valves



a Geberit company

## **Architect/Engineer Specification**

Chicago Faucets No. 732-VBCP, Angle Urinal Valve with riser, wall-mounted, chrome plated. NAIAD rebuildable auto-timed metering cartridge, opens with push. 1/2" NPT female thread inlet. 3/4" O.D. slip outlet. Slip wall flange. 3/4" O.D. x 10-1/4" riser. Anti-siphon vacuum breaker. NOTE: Atmospheric vacuum breaker is NOT intended for continuous pressure applications. This product is tested and certified to industry standards: ASME A112.18.1/CSA B125.1, and ASSE 1001.

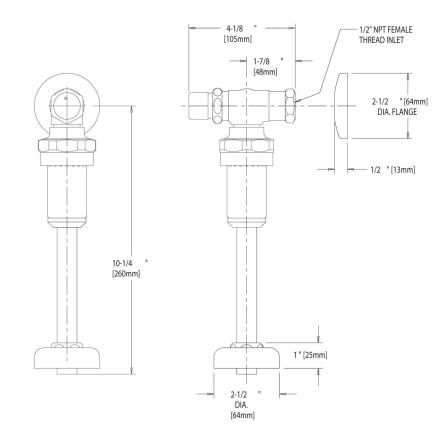

### **Operation and Maintenance**

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at <a href="https://www.chicagofaucets.com">www.chicagofaucets.com</a>.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454 Technical: 800/TEC-TRUE www.chicagofaucets.com