


Submitted Model No.:

Specific Features:

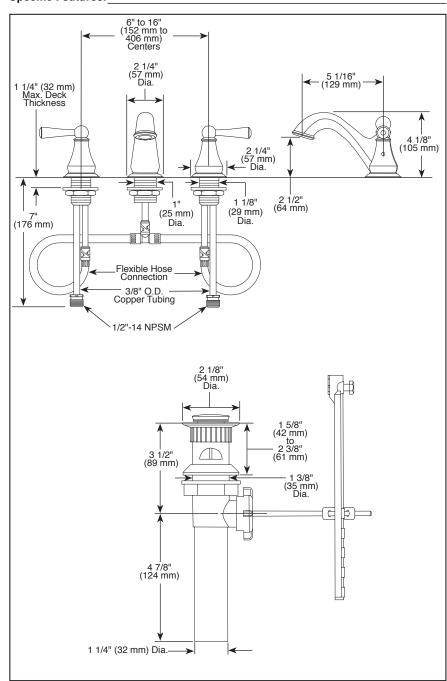

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability. DSP-L-35999LF Rev. D



see what Delta can do

BATHROOM FAUCET

- HaywoodTM Series
- Two Handle Widespread Deck Mount

FEATURES:

Quick-Snap[®] Installation

STANDARD SPECIFICATIONS:

- Max. flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Three hole mount
- Solid brass fabricated end valve and spout bodies
- 1/4 turn handle stops
- Control mechanism is a rotating cylinder with stainless steel plate and 90° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 3/8" O.D. copper supply tubes
- Standard mounting deck thickness can be extended 1" with RP10612

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1ASME A112.18.2 / CSA B125.2

Indicates compliance to Indicates compliance to ICC/ANSI A117.1 - Valve control only

- EPA WaterSense®
- Verified compliant with 0.25% weighted average Pb content regulations

Delta Faucet Company 55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON NSP 4L1 © 2020 Delta Faucet Company